

BRETFORD BASICS™

MOBILE HEIGHT ADJUSTABLE PRESENTATION CART

MOBILE HEIGHT ADJUSTABLE PRESENTATION CART

TC35 provides room for a projector and presentation materials on the top shelf and two pull out shelves for a laptop and document camera. Locking lower cabinet provides space for electronics and other equipment.

TC35FC has the same features but includes a mounting pole for up to 42" monitors with a 200mm VESA mounting hole pattern.



TC35-BK



TC35FC-BK

FEATURES

- Ideal for presentations and instructional use, large cart provides room for a data projector, notebook computer, document camera, DVD player, and scanner with an option to mount up to a 42" flat panel monitor.
- TC35FC includes an aluminum pole and mounting bracket for up to a 42" flat panel monitor, 90 lbs maximum. Flat panel monitor must include a 200 x 200mm or 200 x 100mm VESA mounting hole pattern.
- Pull-out shelves are located on both the left and right sides and are 14"w x 20-3/4"d. Shelves have 2" clearance below the top shelf and height adjust between 26-1/2" and 34-1/2" in 1" increments.
- Locking lower cabinet provides safe storage of electronics and equipment and includes grommet holes for cord management. Cabinet may be equipped with a 4-outlet electrical unit, electrical unit is standard on TC35FF and TC35FCFF models.
- Top shelf is adjustable from 31" to 39"H in 1" increments and reinforced to accommodate an aluminum 28" flat panel mounting pole. Flat panel mounting pole is standard with the TC35FC and TC35FCFF models.
- Heavy-duty 1" square tubular legs with "W" bracket shelf design for maximum strength.
- All-steel construction with die pressed shelves.
- Features an average 30% post-consumer recycled steel and an environmentally friendly powder paint finish.
- 4" Quiet-Glide stem casters, two are locking. Each caster is load rated to 115 lbs.
- TC35FF and TC35FCFF include a UL & C-UL listed, surge protected, 4-outlet electrical assembly with on/off switch and 20' grounded power cord. Electrical unit mounts inside the lower cabinet.
- Available in an environmentally friendly Black (-BK) powder paint finish.

DIMENSIONS

TC35 Overall: 32-1/2"w x 24-1/4"d x 31" to 39"h
TC35FC Overall: 32-1/2"w x 24-1/4"d x 59" to 67"h
Storage Cabinet: 30"w x 23"d x 15-7/8"h
Storage Cabinet Doors: 12"h
Pull Out Shelves: 14"w x 20-3/4"d
Pull Out Shelves to Floor: 26-1/2" to 34-1/2"h
Pull Out Shelves Clearance to Top Shelf: 2"h
Flat Panel Monitor Pole (TC35FC only): 28"h

COLOR & FINISH

Black (-BK) powder paint

WEIGHT, FREIGHT CLASS AND UPC CODE

TC35-BK: 83 lbs., Freight class 70 UPS
0 96633 27646 2
TC35FF-BK: 87 lbs., Freight class 70 UPS
0 96633 27647 9
TC35FC-BK: 98 lbs., Freight class 70 UPS
0 96633 27649 3
TC35FCFF-BK: 102 lbs., Freight class 70 UPS
0 96633 27648 6



Both ship ready to assemble in one (1) carton pack and are available to ship via UPS.

CARTON DIMENSIONS

TC35 & TC35FF: 34-1/2"l x 33"w x 9-1/2"d
TC35FC & TC35FCFF: 39-1/2"l x 33"w x 9-1/2"d

ACCESSORIES

FPPSP31 - 31" Speaker Bar, Aluminum - 0 96633 26890 0
CFPS - 4 Outlet Electrical Unit (inc. on FF models) - 0 96633 10076 7
UCSE10 - 10 Outlet Electrical Unit - 0 96633 11038 4




Shelves pull out left and right for computers and projectors



SUGGESTED SPECIFICATIONS

TC35 and TC35FC Height Adjustable Technology Carts have one (1) 32-1/2"w x 24-1/4"d, 18-gauge steel top shelf with 20-gauge steel stiffener and TC12FC Technology Carts with flat panel pole have one (1) 32-1/2"w x 24-1/4"d, 18-gauge steel top shelf with 12-gauge steel stiffener. Both top shelves have the corners open so the sides of the shelf do not connect. The upper leg assembly fits flush to the top shelf and attach with a 13-gauge steel "W" bracket design that interlocks the legs and shelves for maximum strength and stability. Upper leg assemblies are 1-1/2" square tubular 18-gauge steel and fit over the lower 1" square tubular 18-gauge steel leg assemblies for height adjustability of the top shelf. Lower leg assemblies form the corners of the lower cabinet and attach to the upper and lower shelves with a 13-gauge steel "W" mounting bracket with 1/4" square head bolts and hex nuts that hold leg securely to table. Perforated 20-gauge steel cabinet side panels mount using the square head bolts that secure the shelves to the legs. Cabinet interior is 30"w x 23"d, cabinet doors are 12"h. Each lower leg has a hard plastic caster insert mounted in the bottom of the tube. TC35FC and TC35FCFF include a 28" long aluminum pole and mounting bracket for a flat panel monitor up to 42" or 90 lbs. Flat panel monitor must include 200 x 200mm or 200 x 100mm VESA mounting hole pattern in the back panel. TC35 and TC35FC carts have two (2) 14"w x 20-3/4"d, 18-gauge steel pull-out shelves that extend off the left and right sides. Shelves are height adjustable with the top shelf and may be set from 26-1/2" to 34-1/2"h in 1" increments. There is 2" clearance under the top shelf when pull out shelves are pushed in. Models # TC35FF and TC35FCFF include a UL and C-UL listed, surge protected 4-outlet electrical assembly with on/off switch and 20' 3-wire cord and two (2) 3/16" diameter machine screws with nuts for attaching unit to the back panel of the cabinet. Constructed with "prime" steel which has a 25% to 35% post-consumer recycled content. Electrical assembly is UL and C-UL listed when attached to cart. Stem casters are mar-resistant, hard black rubber, 4" in diameter. Each caster assembly has ball bearing swivel capabilities, steel construction and is load rated for 115 lbs each. Two (2) have locking brakes. Finished in Black (-BK) powder paint. Ships knocked down (KD) via truck LTL class 70 or via UPS.

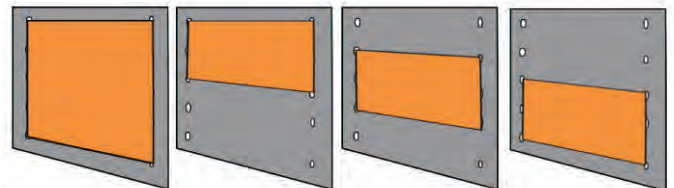

TC35FC and TC35FCFF features a VESA compliant mounting plate for monitors with a 200mm x 200mm or 200mm x 100mm mounting hole pattern

11000 SEYMOUR AVENUE
FRANKLIN PARK, ILLINOIS 60131 USA
TOLL FREE PHONE 800-521-9614
PHONE 847-678-2545
TOLL FREE FAX 800-343-1779
FAX 847-678-0852
WWW.BRETFORD.COM