


# Samsung Digital Presenter **UF-80DX/ST**

	Item	UF-80DX	UF-80ST	
Optical system	Lens	F=1.5(Wide)-2.1(Tele) f=4.8-67.2, 14X power zoom		
	Shooting area	Max : 229.4(8.5") x 308(11.7")mm, Min : 16.4(0.63") x 21.7(0.82")mm		
	Zoom	Powered (14X), Seamless Digital (3X)		
	Focus	Powered (Auto Focus / Manual)		
Lighting system	Iris	Auto (with fine level adjustment)		
	Upper lamp	Cold-cathode Lamps		
	Lower lamp	Reflective base for transparencies or Optional SLB-80 Light Box		
	Pick-up device	1/3" 850,000pixels Progressive Scan CCD		
Video	Effective pixels	1,034(H) X 779(V)		
	Frame rate	20 frames/sec		
	Sync. system	Internal sync.		
	VGA output	1024 x 768(XGA) RGB color.		
	White Balance	Manual / Auto (one touch type)		
	Freeze	Built-in		
	Input terminals	VGA : 1		
	Output terminals	VGA : 1, USB : 1, RS-232C : 1, DVI : 1		
	Output Frequency	User Selectable, XGA 75Hz or 60Hz		
	Remote control	Supplied (dual receivers on camera)		
	GUI (Graphic User Interface)	Available via PS/2 Mouse - control via pull-down menu plus pointer & annotation		
	Input selection	2 channels (Internal : 1, External : 1)		
	On-screen display	Available		
	Text Enhancement	Available, Text & Image settings automatically stored		
	Image freeze	Available		
	Image save	Available (8 frames)	Unavailable	
	3x3 Preview Mode	View all 8 images at once for preview and selection	Unavailable	
	Image recall	Available (8 frames)	Unavailable	
	Image divide / Image shift	Available (view stored image with live image)	Unavailable	
	Digital Image rotation	Available (90°, 180°, 270°, 0°)	Unavailable	
Image transfer to computer	Available (USB : FULL, 1/4, 1/16 Preview Modes with Quick Capture)			
PC connection	Preset function	Up to 4 user settings		
	USB	Built-in USB 2.0		
	RS-232C	SET control		
	Application software	Windows 98, 98SE, ME, 2000 Professional, XP, TWAIN Driver (for windows) & Mac OSX (10.3)		
General	Security Lock	Built-in, "Kensington" style		
	Flexible Camera Head	± 90°		
	Operating temperature/ Humidity	+5°C ~ +35°C (+41°F ~ +95°F), 30% ~ 90% Humidity		
	Power	DC12V (Adaptor Input : AC100V-240V Free Voltage, 50/60Hz, Output : 12V, 3.5A) DC Output- Available for SLB-80 Light Box, DC 12V OUT, 0.6A		
Dimensions (WxDxH)	In-use : 404(16") x 504(20") x 488(19") / Stored : 404(16") x 504(20") x 206(8")			
Weight	5kg (11 lbs.)			
Accessories Included	Power cable, IR Remote, PS2 Mouse, VGA, DVI, USB Cables, Software, Soft cover, Manuals, Carrying bag			

## Dimension

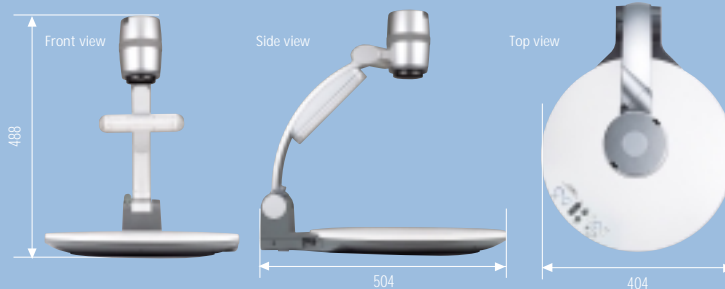

## Accessories



The Eco mark represents Samsung Techwin's will to create environment-friendly products, and indicates that the product satisfies the EU RoHS Directive.

Design and specifications are subject to change without notice.



**SAMSUNG TECHWIN CO., LTD.**  
145-3, Sangdaewon 1-dong, Jungwon-gu,  
Seongnam-si, Gyeonggi-do 462-703, Korea  
Tel : +82-31-740-8139 Fax : +82-31-740-8145  
www.samsungpresenter.com

**SAMSUNG OPTO-ELECTRONICS AMERICA, INC.**  
ELECTRONIC IMAGING DIV.  
40 Seaview Drive, Secaucus, NJ 07094, U.S.A  
Tel : +1-201-902-0347 Fax : +1-201-902-0429

**SAMSUNG OPTO-ELECTRONICS UK, LTD.**  
Samsung House, 1000 Hillswood Drive,  
Hillswood Business Park Chertsey, Surrey KT16 OPS  
Tel : +44-1932-45-5308 Fax : +44-1932-45-5325

**SAMSUNG TECHWIN MOSCOW OFFICE**  
Korp 14, 37-A, PR-KT, Leningradsky,  
Moscow 125167, Russia  
Tel : +7-95-258-9296, 9298 Fax : +7-95-258-9297

**TIANJIN SAMSUNG OPTO-ELECTRONICS CO., LTD.**  
7 Pingchang Rd., Nankai Dist. Tianjin 300190, P.R. China  
Tel : +86-22-2761-4724(53821) Fax : +86-22-2761-6514

■ DISTRIBUTED BY

