

# BRETFORD BASICS™

## WIDE BODY TV CART

### BBILS1-P4, BBILS1-E4 & BBILS1-M4

Bretford's open shelf level one ILS cart, BBILS1, has the strength and stability to support heavy audio video equipment. Features a convenient slide-out shelf at stand-up height. Supports large television monitors up to 27" diagonal and its wide-body design provides an oversized base shelf for greater stability especially during transport.



### FEATURES

- Wide-body, pyramid design lowers the center of gravity and provides superior stability for the heaviest loads.
- 44" height for easy viewing.
- Recommended for use with up to a 27" diagonal TV monitor.
- Slide out shelf is 39" high for easy use while standing.
- All steel construction with Black powder paint finish.
- 4" swivel casters, two with locking brakes.
- Grommet hole at rear of shelf for cord management.
- Optional 2 or 3 outlet, UL listed electrical unit attaches to the top shelf using pre-drilled holes and features a 20' power cord and built-in cord winder. Electrical unit comes standard with the BBILS1-E4 and BBILS1-M4 cart.

## DIMENSIONS

Overall: 32" w x 27-1/2" d x 44" h

Bottom Shelf: 32" w x 27-1/2" d

Slide Out Shelf when fully extended: 19-1/2" w x 13-1/2" d

Top Shelves: 32" w x 22" d

Slide Out Shelf to Middle Shelf: 7-1/2" h

Middle to Bottom Shelf: 21-1/2" h

## COLOR & FINISH

Black (-BK) powder paint

## STANDARD EQUIPMENT

32" w x 22" d Shelf (2)

31-1/4" x 19-1/2" Slide out shelf (1)

32" w x 27-1/2" d Shelf (1)

1" square Black caster inserts (4)

1" square plastic tube caps (4)

Shelf rails (2)

E-Unit (1) [BBILS1-E4 and BBILS1-M4 only]

Plastic bag with all necessary hardware for assembly

## WEIGHT AND FREIGHT CLASS

BBILS1-P4: 72 lbs., Freight class 70 UPS.

BBILS1-E4: 74 lbs., Freight class 70 UPS.

BBILS1-M4: 74 lbs., Freight class 70 UPS.

All ship ready to assemble in one (1) carton.

## CARTON DIMENSIONS & UPC CODE

Carton Pack: 28-1/2" l x 41" d x 5-1/2" h


BBILS1-P4 96633 11673

BBILS1-E4 96633 11672

BBILS1-M4 96633 14539

## SUGGESTED SPECIFICATIONS

BBILS1-P4/E4/M4 Level One ILS Cart has two (2) 18-gauge steel 32" w x 22" d shelves and one (1) 18-gauge 32" w x 27-1/2" d shelf (to be used as the bottom or base of the table). Shelves are pressed formed with a 1/8" lip bordering the top surface on all four (4) sides. Corners of the shelves open so the sides do not connect. Table legs fit flush to the shelves. Each corner has 13-gauge steel mounting brackets with 1/4" square head bolts and hex nuts that tighten to hold leg securely to table. The two (2) 32" w x 22" d shelves have two (2) 3/16" diameter holes centered on both the right side and the left side to accept an optional electrical assembly. The slide out shelf

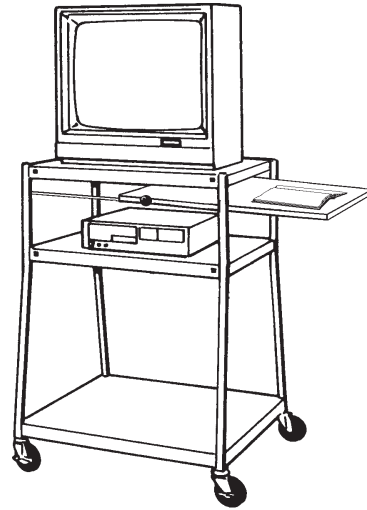

rests at stand up height, 39" from the floor, and is able to pull out 13-1/2" from either side of the table. Legs of table are 18-gauge 1" square tubular steel. Each leg is 39-1/2" in length and angled so the top part fastens to a 32" w x 22" d shelf and the bottom of the leg fastens to a 32" w x 27-1/2" d base shelf. The table stands 44" h from the floor (including the 4" casters). Leg has hard plastic caster insert mounted in the bottom of the tube. Each leg shall have a hard plastic cap detail inserted into the bottom and top of the tube. Each model has a powder paint finish. Casters are mar resistant hard black rubber measuring 4" in diameter. Each caster assembly has ball bearing swivel capabilities and steel construction (two have locking brakes). Optional electrical assembly is completely enclosed with two (2) or three (3) grounded outlets, 20 ft. 3-wire cord and two (2) 3/16" diameter machine screws with wing nuts for attaching unit to cart. Electrical unit is standard with the BBILS1-E4 and BBILS1-M4. Electrical assembly is UL listed when attached only. BBILS1 Level One ILS Carts ships knocked down (KD) in one (1) carton and ships via United Parcel Service (UPS).

## ELECTRICAL UNIT SPECIFICATIONS

Optional electrical assembly is completely enclosed with two (2) or three (3) grounded outlets, 20 ft. 3-wire cord and two (2) 3/16" diameter machine screws with wing nuts for attaching unit to cart. Electrical unit is standard with the BBILS1-E4 and BBILS1-M4. Electrical assembly is UL listed when attached only.



11000 SEYMOUR AVENUE  
FRANKLIN PARK, ILLINOIS 60131 USA  
TOLL FREE PHONE 800-521-9614  
PHONE 847-678-2545  
TOLL FREE FAX 800-343-1779  
FAX 847-678-0852  
WWW.BRETTFORD.COM