

BRETFORD BASICS™

UL LISTED WIDE-BODY CABINET TV CART

BBULC48, BBULC48-C4 AND BBULC48-M4

Bretford's wide-body cabinet stand BBULC48 is tip tested and UL listed for safety and designed to provide greater support for heavy video systems and equipment. Large television monitors of up to 32" diagonal screens are easily supported on the top shelf. Locking lower security cabinet with double doors allows storage of videotapes and accessories.



FEATURES

- Tip tested and UL listed to safely accommodate up to 32" diagonal TV monitor.
- Pyramid design and lower cabinet provide maximum support and stability for large TV monitors.
- Lower cabinet locks for the storage of AV equipment and includes a rear grommet hole for cord management.
- Solid steel construction, smooth rounded shelf edges.
- 2" grommet holes in rear of top two shelves to manage cords.
- Includes an adjustable 8 foot safety belt to secure the TV monitor to the top shelf.
- Sturdy steel construction has a 30% post-consumer recycled content and finished in a durable and environmentally friendly black powder paint.
- BBULC48-C4 includes a UL listed, 2-outlet electrical assembly with 20 foot power cord and built in cord winder, attaches to the top shelf using pre-drilled holes.
- BBULC48-M4 includes a UL listed, 3-outlet electrical assembly with 20 foot power cord and built in cord winder, attaches to the top shelf using pre-drilled holes.

DIMENSIONS

Overall: 32" w x 27-1/2" d x 48" h
Top and Middle Shelves: 32" w x 22" d
Cabinet Interior: 30" w x 26" d x 16-3/4" h
Top to Middle Shelf: 20"

COLOR & FINISH

Black (-BK) powder paint

STANDARD EQUIPMENT

32" w x 22" d Shelf (1)
30" w x 16-3/4" h x 26" d Cabinet (1)
Legs (4)
4" Casters, (2) fixed, (2) swivel and lock
2-Outlet Electrical Unit (1) BBULC48-C4 only
3-Outlet Electrical Unit (1) BBULC48-M4 only

WEIGHT AND FREIGHT CLASS


BBULC48: 94 lbs., Freight class 70 UPS
BBULC48-C4: 96 lbs., Freight class 70 UPS
BBULC48-M4: 96 lbs., Freight class 70 UPS
Ships UPS ready to assemble in one carton pack.

CARTON DIMENSIONS & UPC CODE

Carton Pack: 30" w x 6-1/2" d x 48-1/2" h
BBULC48 0 96633 11680 5
BBULC48-C4 0 96633 11681 2
BBULC48-M4 0 96633 21413 6

SUGGESTED SPECIFICATIONS

BBULC48 TV/VCR Cabinet Stand is UL listed shall have one (1) 18 gauge steel shelf 32" w x 22" d. Shelf shall be press formed such that a 1/8" lip shall border the top surface on all four sides. Shelf shall have two (2) 3/16" diameter holes centered on both the right side and the left side to accept electrical assembly, unit standard on the BBULC48-C4. Each shelf corner shall have 13 gauge steel mounting bracket with 1/4" square head bolts and hex nuts that interlock with the leg assemblies to hold leg securely to table. Stand shall have wider bottom cabinet (30" w x 16-3/4" h x 27-1/2" d) of 18 gauge steel as its base. Cabinet shall have two (2) 20 gauge steel doors 15" w x 16-3/4" h with recessed handles. Each door shall be attached to a full-length piano hinge such that it will open 180° to allow each access to store equipment. One (1) door shall have lock with 16 gauge steel

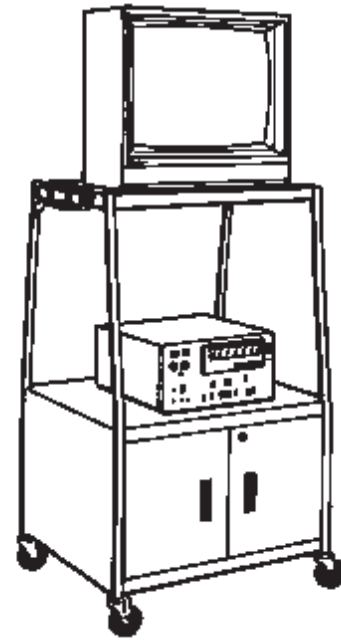

locking bar and retaining bracket. Legs shall be of 18 gauge 1" tubular steel. Each leg is 44" in length and angled such that the top shall fasten to 32" w x 22" d shelf and the bottom shall fasten to a 30" w x 16-3/4" h x 27" d cabinet. Stand shall be 48" h from the floor (including 4" casters). Each leg shall have a hard plastic caster insert mounted in the bottom of the tube. Each model is constructed using "prime" steel which has a 25% to 35% post-consumer recycled content and is finished in a durable and environmentally friendly powder paint. Casters shall be mar-resistant black hard rubber and 4" in diameter, two (2) are fixed and two (2) swivel with a locking brake. Adjustable SB Safety Belt shall be included to hold the monitor to the top shelf. BBULC48-C4 shall include an electrical assembly with two (2) grounded outlets and two (2) 3/16" diameter machine screws with wing nuts for mounting. BBULC48-M4 shall include an electrical assembly with three (3) grounded outlets and two (2) 3/16" diameter machine screws with wing nuts for mounting. Electrical assembly shall be UL Listed when attached to cart. Unit shall ship knocked down (KD) in one carton such that it may ship via United Parcel Service (UPS).



11000 SEYMOUR AVENUE
FRANKLIN PARK, ILLINOIS 60131 USA
TOLL FREE PHONE 800-521-9614
PHONE 847-678-2545
TOLL FREE FAX 800-343-1779
FAX 847-678-0852
WWW.BRETTFORD.COM